


## Stud Track Rollers / Stud Cam Followers ( Inch Size )

Part name: **CF 2 3/4** or **CF-2 3/4** stud type track roller

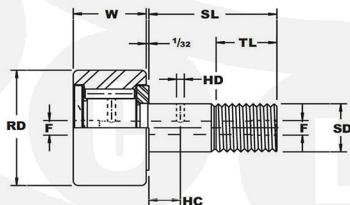

Cylindrical O.D.

Part No.: **CF 2 3/4** or **CF-2 3/4**

| Manufacturer                 | © CLI BEARINGS CO., LTD.                  |
|------------------------------|-------------------------------------------|
| Interchangeable Maker        | McGill                                    |
| System of Measurement        | Inch                                      |
| Type                         | Standard Stud                             |
| Roller Shape                 | Cylindrical                               |
| Internal Construction        | Full Compliment                           |
| For Load Direction           | Radial                                    |
| Mounting Method              | Screwdriver Slot                          |
| Seal Type                    | Unsealed                                  |
| Platform                     | Camrol                                    |
| Roller Material              | GB GCr15 / DIN 100Cr6 / AISI 52100 / SUJ2 |
| Roller Dia (RD)              | 2.75"                                     |
| Roller Width (W)             | 1.5"                                      |
| Stud Dia (SD)                | 1"                                        |
| Stud Length (SL)             | 2.25"                                     |
| Threads                      | 1-14                                      |
| Minimum Thread Length (TL)   | 1.125"                                    |
| Shoulder Dia                 | 1.69"                                     |
| Shoulder Length              | 0.03"                                     |
| Lubrication Fitting Size (F) | 0.1875"                                   |
| Clamping Torque              | 2250 lbf                                  |
| Max Speed                    | 1050                                      |
| Static Radial Load           | 10300 lbf                                 |
| Dynamic Radial Load          | 11720 lbf                                 |
| RoHS                         | Compliant                                 |
| REACH                        | Compliant                                 |
| Weight                       | 2.97 LB                                   |