


One-Way Roller Clutch (Metric Sizes)

FC - One-way Clutch with Multi-roller and Stainless Steel Springs

FCB - One-way Clutch and Bearing Assembly with Multi-roller and Stainless Steel Springs

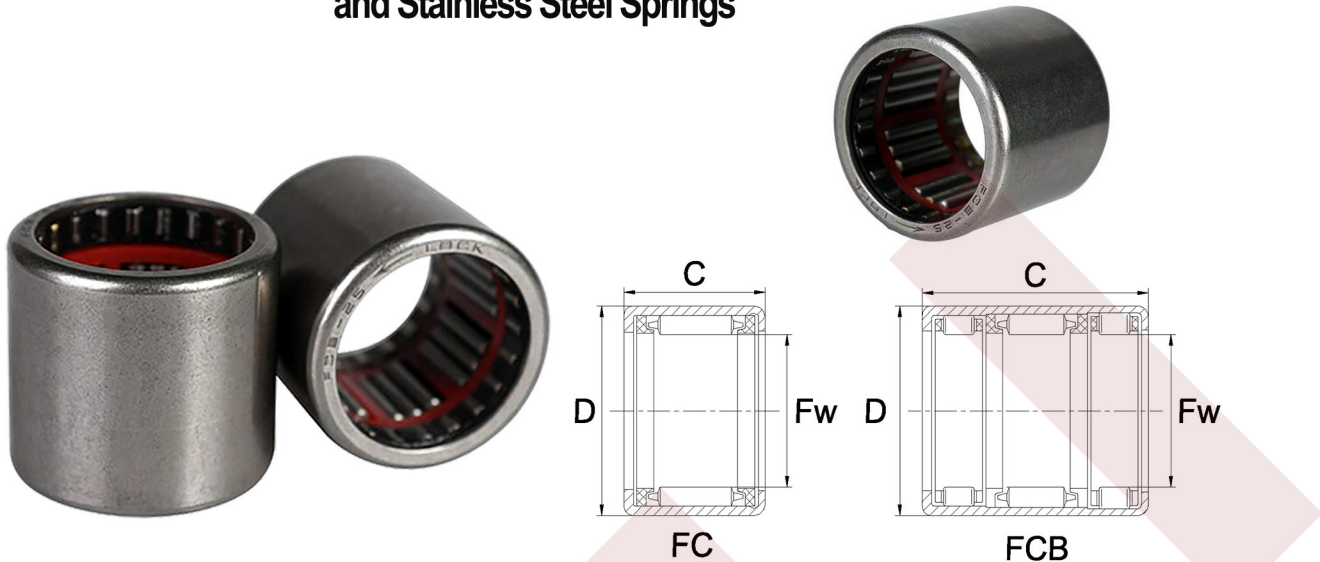

Part Number	Dimension(mm)			Torque Rating(Nm)	Limiting Speed (RPM)	Weight(g)
	F _w	D	C			
FC6	6	10	12	2.63	22000	4
FC8	8	14	12	4.42	21000	7
FC10	10	16	12	5.82	19000	9
FC12	12	18	16	14	19000	12
FC16	16	22	16	21.7	14000	18
FC20	20	26	16	32.6	11000	21
FC25	25	32	20	71	8700	34
FC30	30	37	20	99.1	7300	42

Part Number	Dimension(mm)			Torque Rating(Nm)	Limiting Speed	Weight(g)
	F _w	D	C			
FCB8	8	14	20	4.42	21000	11
FCB10	10	16	20	5.82	19000	13
FCB12	12	18	26	14	19000	18
FCB20	20	26	26	32.6	11000	28
FCB25	25	32	30	71	8700	48
FCB30	30	37	30	99.1	7300	54

* Note: **FC** = Regular Clutch with Multi-roller and Stainless Steel Springs

FCB = Regular Clutch & Bearing Assembly with Multi-roller and Stainless Steel Springs